

525,935

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



25 FEB 2005



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021319 A1

(51) International Patent Classification⁷: **G09F 13/18,**
G02B 6/00

(21) International Application Number:
PCT/GB2003/003780

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0220005.3 29 August 2002 (29.08.2002) GB

(71) Applicant and

(72) Inventor: **OLIVER, David, Noel** [GB/GB]; 116/120 High
Street, Hampton, Middlesex TW12 2ST (GB).

(74) Agent: **BROWN, Michael, Stanley**; Alpha & Omega,
Chine Croft, East Hill, Ottery St. Mary, Devon EX11 1PJ
(GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: DISPLAY DEVICE

(57) Abstract: A display device includes an edge-lit light-transmitting sheet having first and second opposed parallel surfaces. A matrix is applied to at least one of the first and second surfaces and comprises a series of lines extending between opposed edges of the sheet. The spacings between the lines and/or the thicknesses of the lines are so chosen as to obtain a desired intensity of illumination at selected areas of the sheet.

WO 2004/021319 A1

DISPLAY DEVICE

Field of the Invention

This invention relates to display devices of the kind that include an edge-lit light-transmitting sheet having first and second opposed parallel surfaces.

Such a display device is hereinafter referred to as “a display device of the kind specified”. It is to be understood that the term “display device” includes an illuminated sign, such as is used for advertising and promotional purposes.

One form of display device of the kind specified is described in European Patent Specification No. 0 549 679, which relates to a display device in which the first and second surfaces each have a matrix of etched, painted or screen-printed dots substantially covering said surfaces.

Another form of display device of the kind specified is described in PCT Specification No. WO 00/58931, which relates to a display device in which at least one of the first and second surfaces has a matrix of spots each having a hollow transparent interior substantially covering at least a major portion of the surface to be illuminated.

With display devices of the kind specified it is important that the presented surfaces of the device are illuminated substantially equally and, in particular, that the degree of illumination should not fall significantly at positions spaced from the source(s) of illumination.

It is accordingly an object of the present invention to provide an improved method of making a display device of the kind specified.

A further object of the present invention is to provide an improved form of display device of the kind specified.

Summary of the Invention

According to a first aspect of the present invention there is provided a method of making a display device of the kind specified which includes applying a matrix to at least one of the first and second surfaces which comprises a series of lines extending between opposed edges of the sheet and in which the spacings between the lines and/or the thicknesses of the lines are so chosen as to obtain a desired intensity of illumination at selected areas of the sheet.

According to a second aspect of the present invention there is provided a display device of the kind specified which includes a matrix applied to at least one of the first and second surfaces which comprises a series of lines extending between opposed

edges of the sheet and in which the spacings between the lines and/or the thicknesses of the lines are so chosen as to obtain a desired intensity of illumination at selected areas of the sheet.

A matrix of markings is preferably applied to each of the first and second surfaces so as to cover at least a major proportion of each surface.

The sheet of light-transmitting material is preferably of generally rectangular form and there is preferably a first series of lines extending between two of the opposed edges of the sheet and a second series of lines extending between the other two opposed edges of the sheet.

The two series of lines intersect to define a plurality of polygons, which may be squares or rectangles, but are preferably hexagons, i.e. the matrix is in the form of a honeycomb pattern.

Thus, according to a further aspect of the present invention there is provided a display device of the kind specified which includes a matrix applied to at least one of the first and second surfaces and in which the matrix is of honeycomb form.

The light-transmitting sheet may be of an acrylic material, but other transparent materials, such as glass, may be employed. One other possible material is PETG, i.e. glycol-modified polyethylene terephthalate.

The preferred method of applying the markings is by inkjet printing. This produces a substantial reduction in respect of the quality control problems that have previously been encountered when making display devices of the kind specified.

The markings may, however, be applied by means of a stencil, by means of a transfer, by laser printing or by engraving. Whichever means of applying the markings is chosen, a computer-controlled system may be used for choosing the thicknesses of the lines forming the hexagons and/or the sizes of the hexagons.

Brief Description of the Drawings

Figure 1 of the drawings shows a hexagon pattern forming part of the surface of an illuminated sign,

Figure 2 of the drawings shows another hexagon pattern,

Figure 3 of the drawings is a graph comparing the degree of illumination of an illuminated sign having markings as shown in Figure 1 with the degree of illumination of a known form of illuminated sign as referred to in the introduction to this specification,

Figure 4 shows levels of illumination obtained with fluorescent lamps placed against both ends of a rectangular sheet of acrylic resin to both sides of which a matrix has been applied, and

Figure 5 shows levels of illumination obtained using different light sources.

Description of the Preferred Embodiments

Figure 1 shows the matrix in accordance with the present invention that is applied to both sides of a rectangular sheet of clear acrylic resin. The matrix of Figure 1 comprises a plurality of hexagons each of which has a maximum dimension of 4 mm. The thicknesses of the sides of the hexagons vary from one end of the matrix to the other, with the thickness increasing with increased distance from the light source. As viewed in Figure 1, the light source will be at the top of the sheet and the thicknesses of the sides of the hexagons vary logarithmically from 0.3pt to 1.77pt.

If the illuminated sign or display device has light sources at both ends, then the thicknesses of the sides of the hexagons will increase from both ends of the rectangular sheet and will have maximum values at the centre of the sheet.

In addition to, or instead of, using hexagons that have sides of increasing thickness with increasing distance from the light source, it is possible to reduce the sizes of the hexagons with increasing distance from the light source.

The matrix of Figure 2 comprises a plurality of hexagons each of which has a maximum dimension of 3 mm. The thicknesses of the sides of the hexagons vary from one end of the matrix to the other, with the thickness increasing with increased

distance from the light source. As viewed in Figure 2, the light source will be at the top of the sheet and the thicknesses of the sides of the hexagons vary logarithmically from 0.3pt to 1.9pt.

Although the preferred matrix configuration comprises a plurality of hexagons, other configurations may be used, for example, squares, rectangles, diamond shapes, octagons and the like.

It is to be appreciated that, if increased illumination is required in a particular area of a sign, for example, to high-light a specific part of an advertisement, the sides of the hexagons in that particular part of the matrix will be of increased thickness.

Figure 3 gives comparative figures for results obtained with:-

- a) a display device or sign in accordance with the present invention and having an applied matrix as shown in Figure 1, and
- b) a sign produced as described in European Patent Specification No. 0 549 679.

Each sign included an acrylic sheet having a thickness of 10 mm. and the upper line on the chart is that for the sign of the present invention.

As will be seen from Figure 3, the degree of illumination obtained with the sign in accordance with the present invention is consistently superior to that obtained using a sign in accordance with European Patent Specification No. 0 549 679.

The markings can be applied to the light-transmitting sheet in any convenient way and may be in the form of a transfer that is bonded to the sheet. They may also be applied by, for example, inkjet printing and laser printing.

Figure 4 shows levels of illumination obtained with fluorescent lamps placed against both ends of a rectangular sheet of acrylic resin and with a matrix of hexagons as shown in Figure 1 extending from each end of the sheet, i.e. the sides of the hexagons are of maximum thickness at the centre of the sheet.

In the particular example used to obtain the results shown in Figure 4, the hexagons had maximum dimensions of 3.5 mm. Distances are measured from the centre of the sheet.

Figure 5 shows levels of illumination obtained using different light sources, i.e. a 250w fibre optic light source, a 150w fibre optic light source and a T5 fluorescent light source, each from one end of a rectangular sheet of acrylic resin having a length of 3 metres and with a matrix of hexagons having a maximum dimension of 4 mm. The rise in light output adjacent each of the fibre optic light sources is caused by the cones of light emitted by the fibre optic tails.

As will be seen, for a sign of this size illuminated from one end, optimum results were obtained using a 250w fibre optic light source.

Claims:-

1. A method of making a display device of the kind specified which includes applying a matrix to at least one of the first and second surfaces which comprises a series of lines extending between opposed edges of the sheet and in which the spacings between the lines and/or the thicknesses of the lines are so chosen as to obtain a desired intensity of illumination at selected areas of the sheet.

2. A method as claimed in Claim 1, in which a matrix of markings is applied to each of the first and second surfaces so as to cover at least a major proportion of each surface.

3. A display device of the kind specified which includes a matrix applied to at least one of the first and second surfaces which comprises a series of lines extending between opposed edges of the sheet and in which the spacings between the lines and/or the thicknesses of the lines are so chosen as to obtain a desired intensity of illumination at selected areas of the sheet.

4. A display device as claimed in Claim 2, in which a matrix of markings is applied to each of the first and second surfaces so as to cover at least a major proportion of each surface.

5. A display device as claimed in Claim 2 or Claim 3, in which the sheet of light-transmitting material is of generally rectangular form and there is a first series of lines extending

between two of the opposed edges of the sheet and a second series of lines extending between the other two opposed edges of the sheet.

6. A display device as claimed in Claim 5, in which the two series of lines intersect to define a plurality of hexagons, i.e. the matrix is in the form of a honeycomb pattern.

7. A display device of the kind specified which includes a matrix applied to at least one of the first and second surfaces and in which the matrix is of honeycomb form.

8. A display device as claimed in any one of Claims 3 to 7, in which the light-transmitting sheet is of an acrylic material,

9. A method as claimed in Claim 1 or Claim 2, in which the markings are applied by inkjet printing.

10. A method as claimed in Claim 1 or Claim 2, in which the markings are applied by means of a stencil, by means of a transfer, by laser printing or by engraving.

11. A display device as claimed in Claim 7, produced by a method in which a computer-controlled system is used for choosing the thicknesses of the lines forming the hexagons and/or the sizes of the hexagons forming the honeycomb.

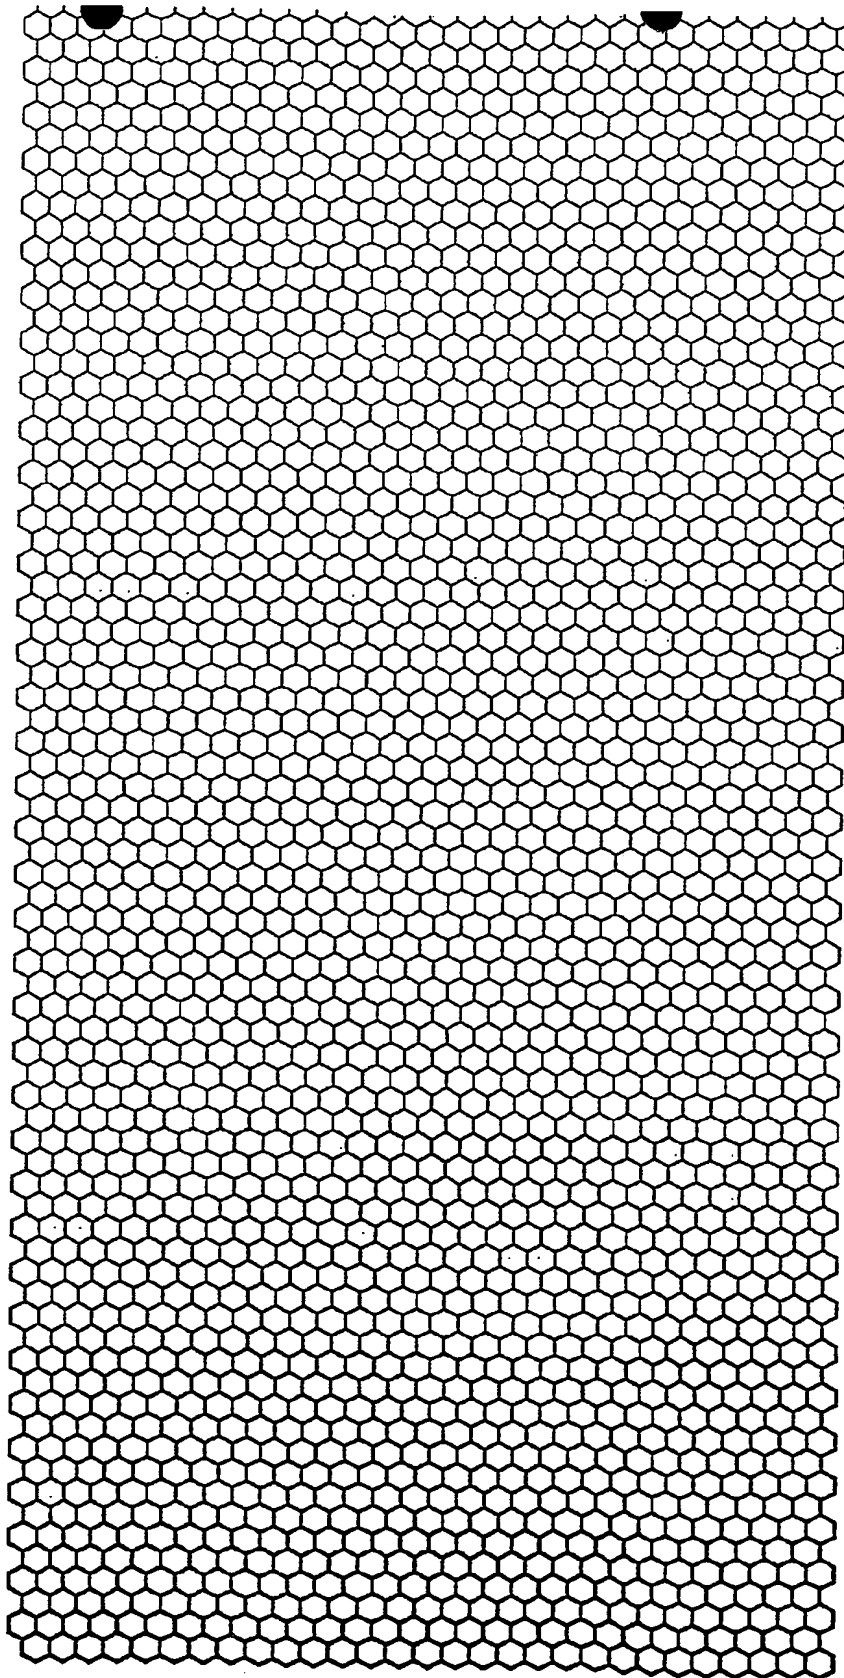


FIGURE
1

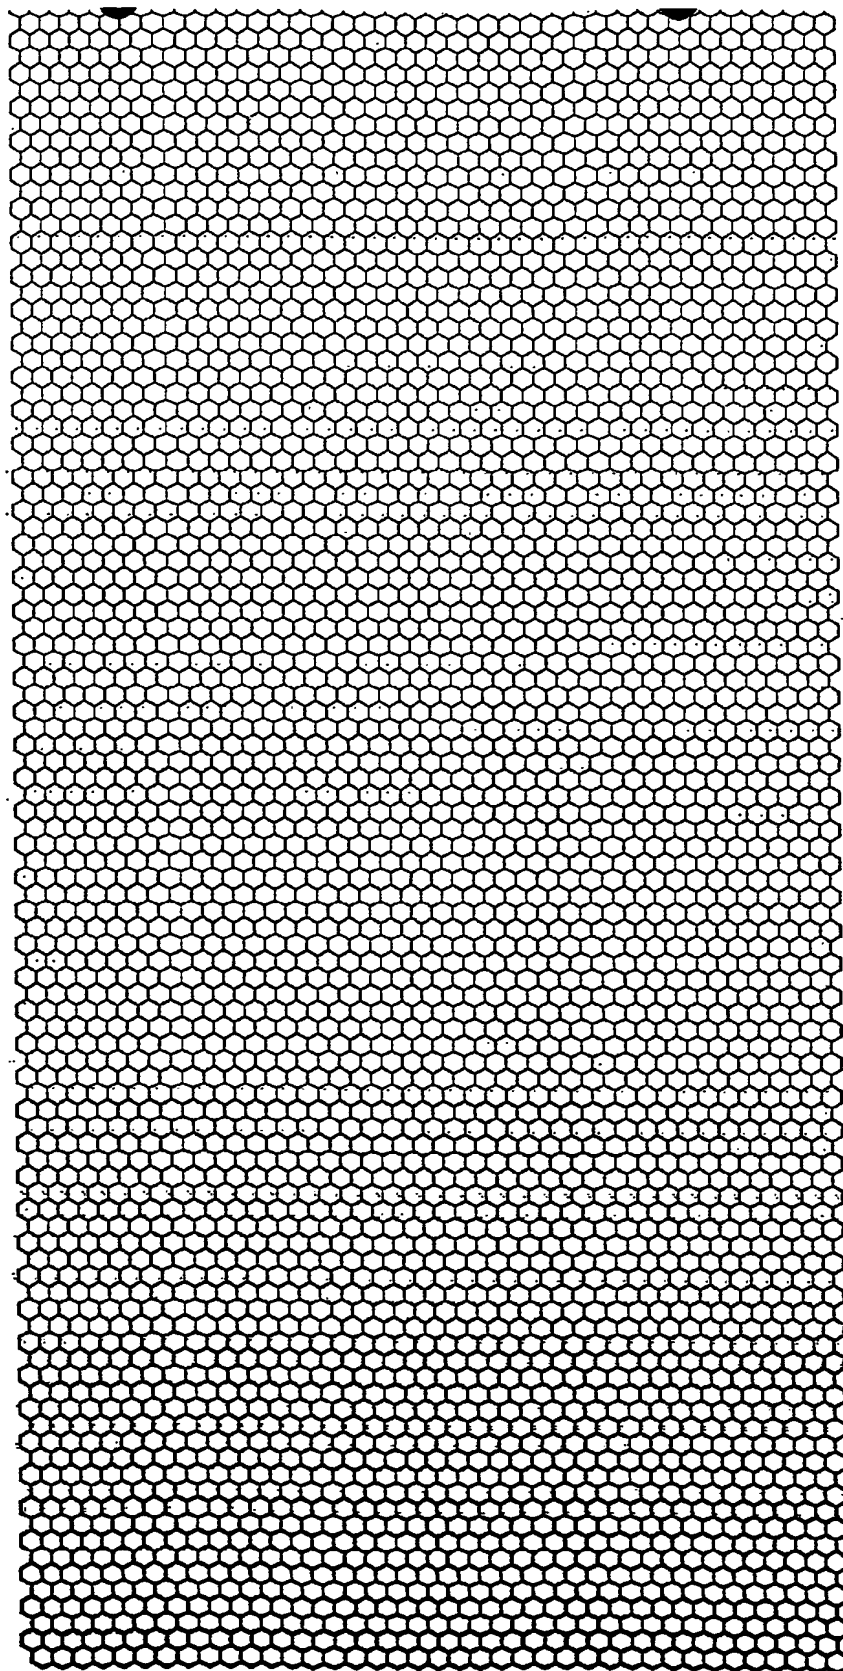
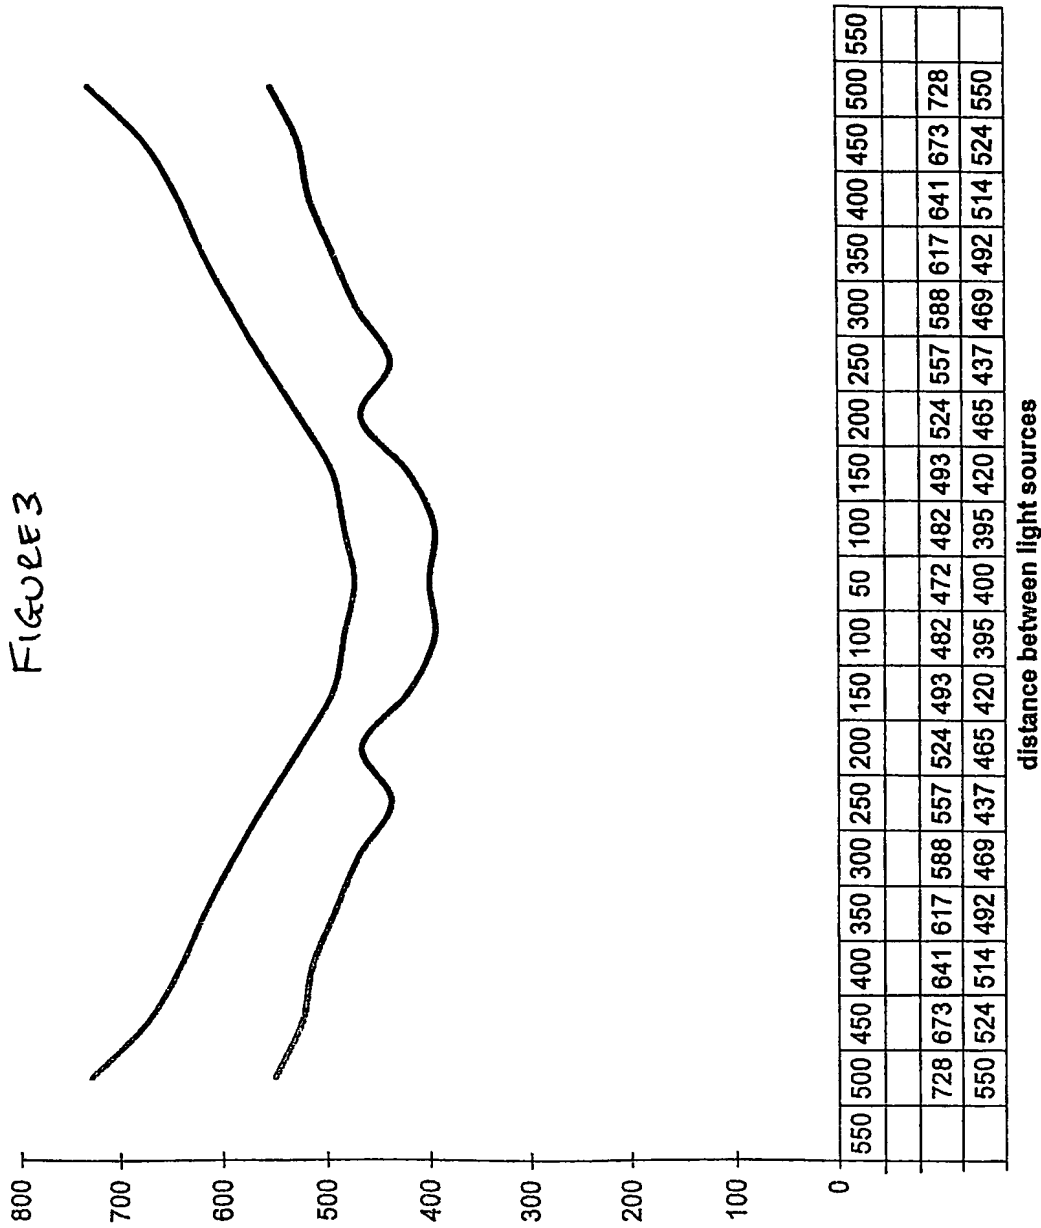


FIGURE
2




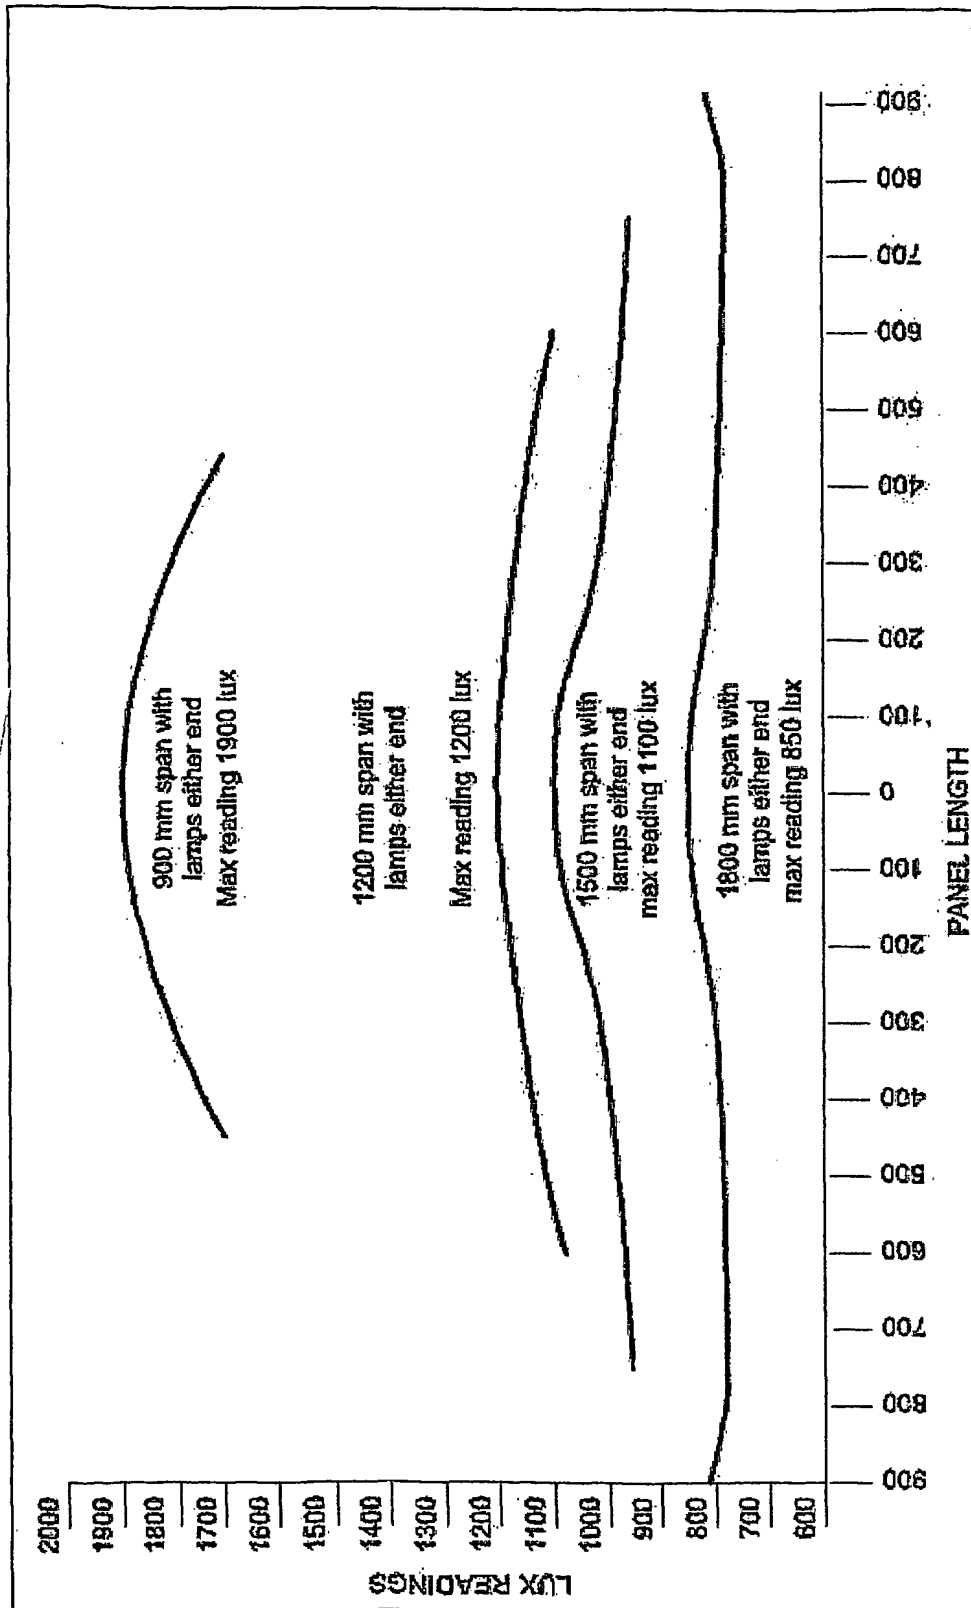


Figure 4

Figure 5

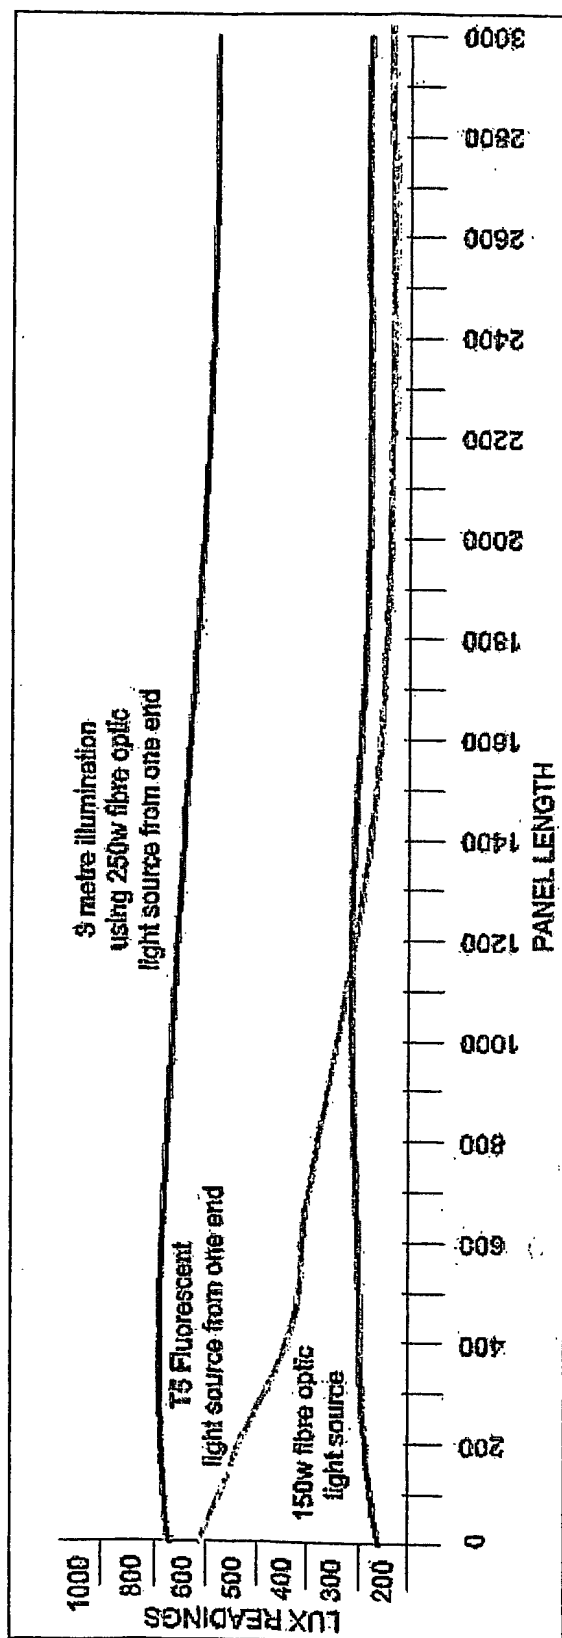

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB 03/03780

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G09F13/18 G02B6/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G09F G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AU 683 874 B (DOUGLAS CRAIG EDWARD) 27 November 1997 (1997-11-27)	1-5,8-10
A	page 1, line 4 -page 3, line 25; figure 1 ---	6,7
X	WO 01 61676 A (MICHAELIDIS CONSTANTINE ;MICHAELIDIS SPIROS (AU); SPICON IND PTY L) 23 August 2001 (2001-08-23)	1-5,8-10
	page 4, line 9 -page 6, line 10; figure 1 ---	
A	WO 97 40486 A (QUEENSBURY INTERNATIONAL LIMIT ;PONSFORD MALCOLM (GB)) 30 October 1997 (1997-10-30)	1-4,8-10
	the whole document ---	
A	EP 0 755 040 A (MUELLER GERHARD) 22 January 1997 (1997-01-22)	1-4,8-10
	the whole document -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

9 February 2004

Date of mailing of the international search report

18/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pavlov, V

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/03780

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
AU 683874	B	27-11-1997	AU 683874 B2	27-11-1997
			AU 6187894 A	10-11-1994
WO 0161676	A	23-08-2001	WO 0161676 A1	23-08-2001
			AU 3350901 A	27-08-2001
			CA 2438529 A1	23-08-2001
			EP 1269452 A1	02-01-2003
			US 2003012010 A1	16-01-2003
WO 9740486	A	30-10-1997	AU 2395297 A	12-11-1997
			EP 0894318 A1	03-02-1999
			WO 9740486 A1	30-10-1997
			GB 2328544 A	24-02-1999
EP 0755040	A	22-01-1997	DE 19526498 A1	23-01-1997
			EP 0755040 A2	22-01-1997